
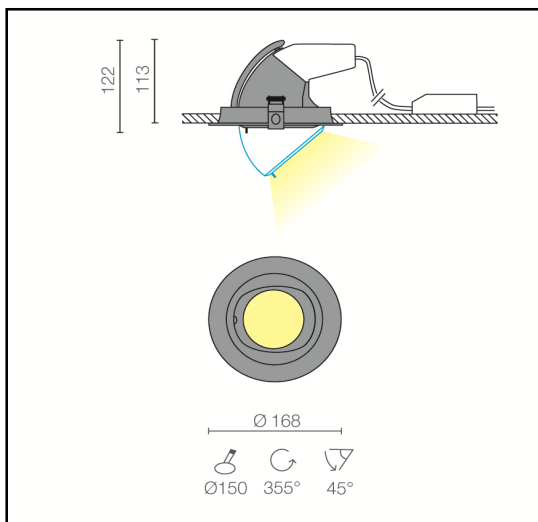


ADJUSTABLE RECESSED DOWNLIGHT

PABLO LED 33W 3000K

5600.33.30

Recessed luminaire that may be adjustable on both axis, complete with a Chip On Board technology high efficiency LED source. Made from epoxy powder coated finish die cast aluminium stabilized with UV rays with reflector super pure 99,9% aluminium, transparent screen and 900mA driver. Available upon request reflector with 24° beam and DALI dimmable switch-dim version. The degree against the penetration of dust, solid and liquids is IP43.

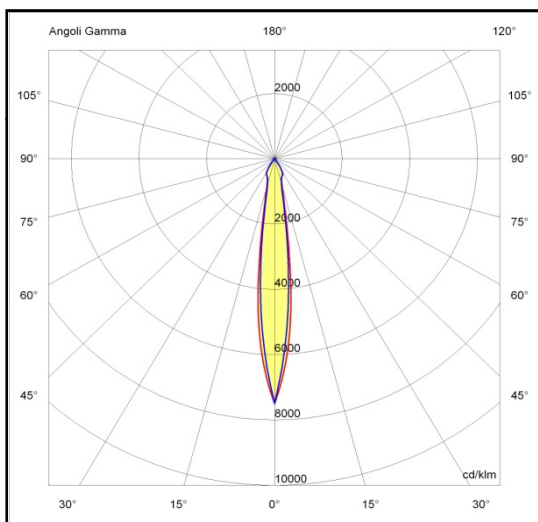

Luminaire details

Supply voltage	230V 50Hz
Driver 900mA	incluso
Insulation class	CL II
IP rating	IP43
Glow wire	960° C
Impact test	IK03
European standards	EN60598-2-1
	EN60598-2-2
	EN62471:2008, EN60825-1

Led details

Lamp	LED
Type	CLU038-1208
CRI	> 80
CCT	3000 K
Typ flux	4460lm
Power	32W
IEE	A++

Colour

08 White satined RAL 9003

Accessories

PA006-24 Reflector 24°

mag-17



Riservata la facoltà di apportare modifiche senza alcun preavviso