




■ IVY

Ø100
Ø145
Ø190
Ø230

Design sobrio ed estrema versatilità contraddistinguono Ivy, apparecchio da incasso completo di moduli LED ad alta efficienza. Realizzato in alluminio pressofuso verniciato a polvere epossipoliestere stabilizzata ai raggi UV, è dotato di schermo di protezione in vetro trasparente o satinato, parabola in alluminio e di driver. Possibilità di richiedere il prodotto in versione dimmerabile. Il grado di protezione contro la penetrazione di polvere, corpi solidi e liquidi è IP43.

Sober design and extreme versatility distinguish Ivy, recessed luminaire equipped with a high efficiency LED light source. It is made from epoxy powder coated finish die-cast aluminum stabilized with UV rays and provided with transparent or satinized screen and aluminum reflector. Driver included. Dimmable version available on request. The degree of protection against the penetration of dust, solid objects and liquids is IP43.

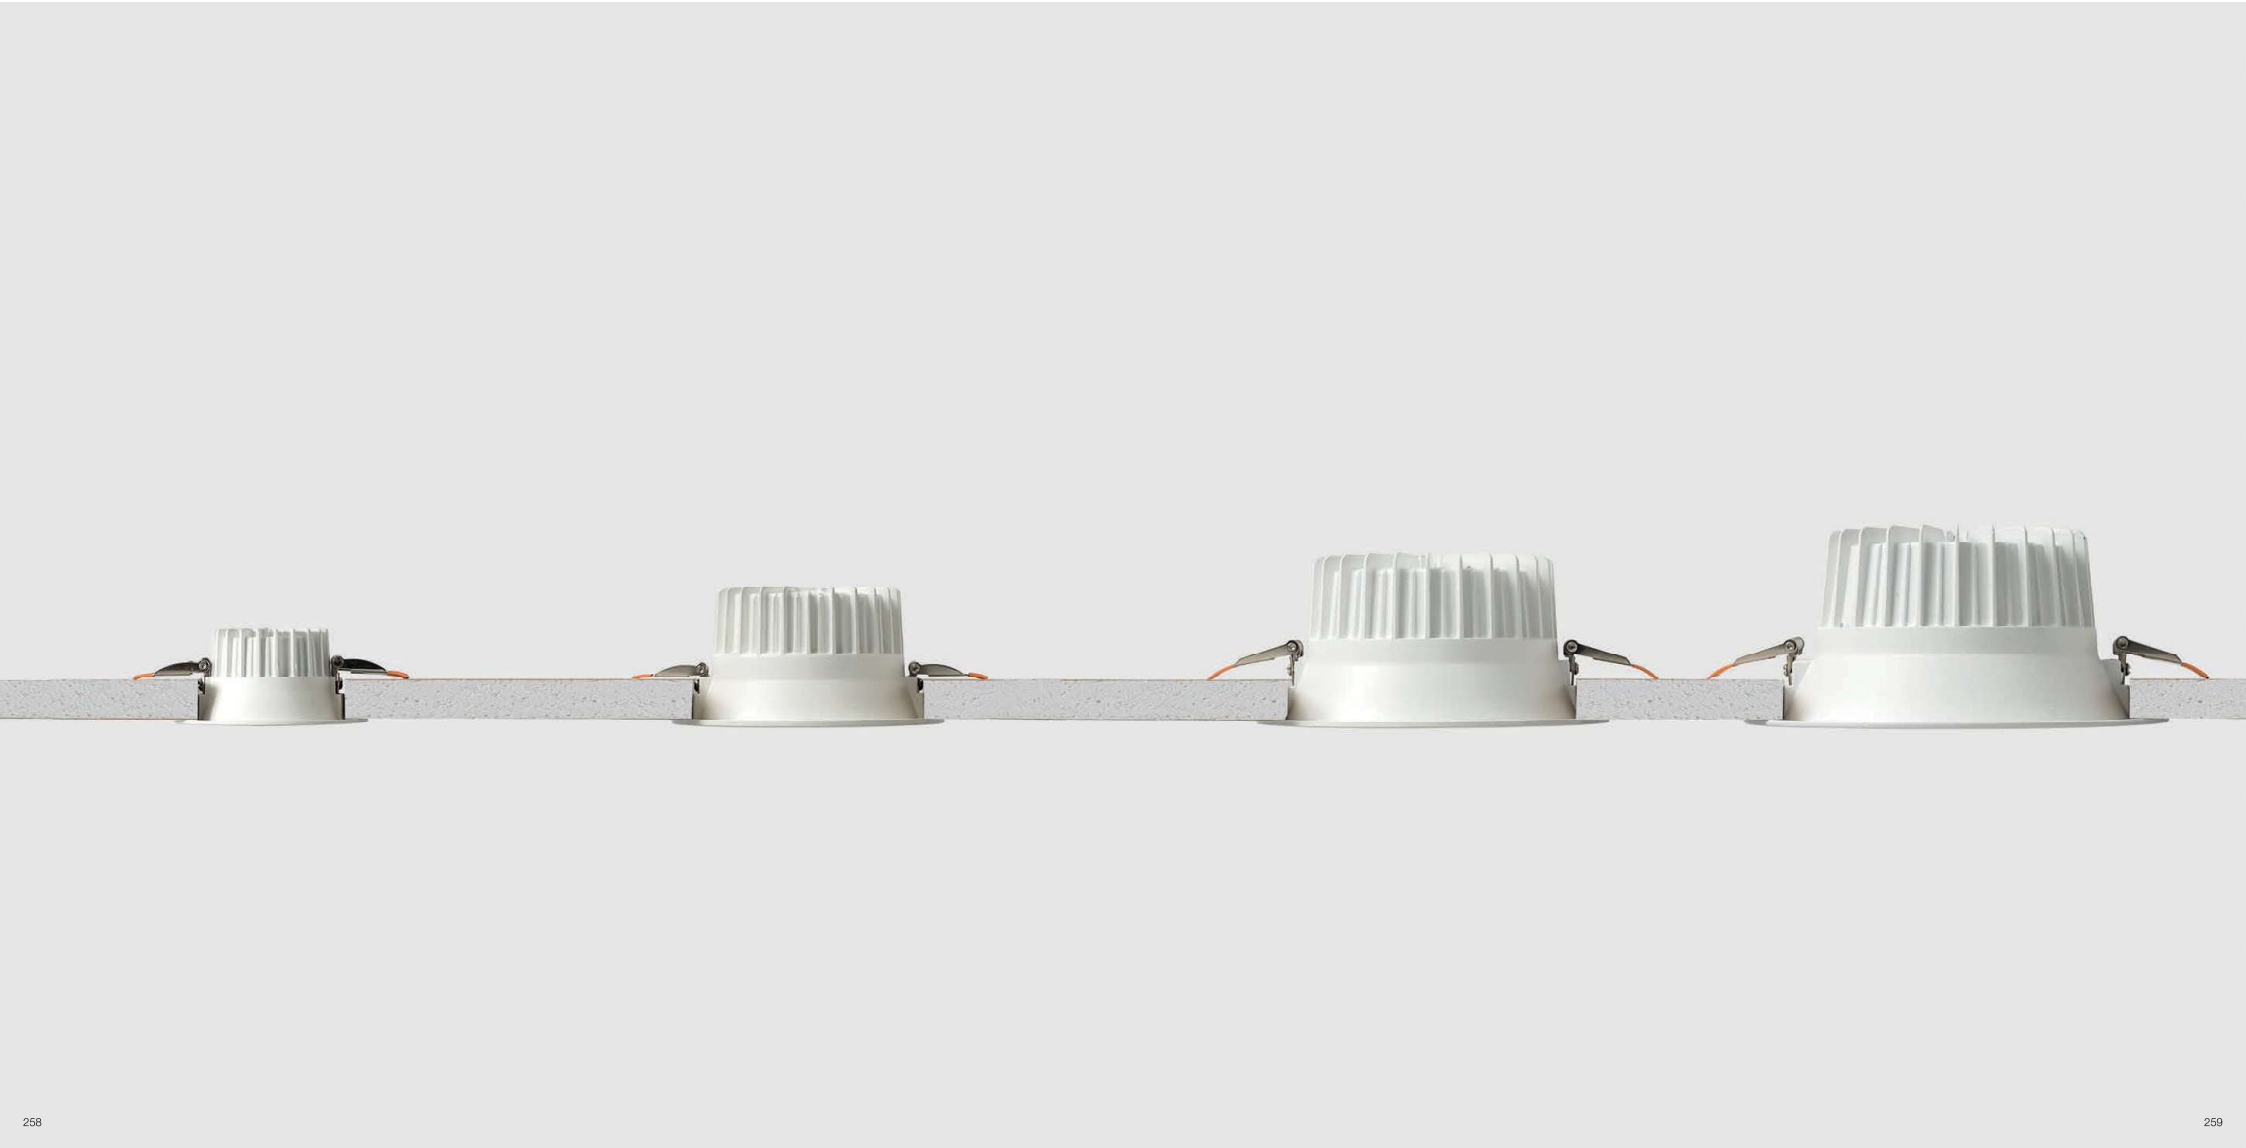



IVY Ø100 VETRO TRASPARENTE

codice	W	Lm (3000K)	lifetime	
5644.07...	7	940	60.000h	L80/B10
5644.09...	9	1220	60.000h	L80/B10




/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

SL	LED
AL	incluso / included
A	60°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	1
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white



IVY Ø100 VETRO SATINATO

codice	W	Lm (3000K)	lifetime	
5645.07...	7	940	60.000h	L80/B10
5645.09...	9	1220	60.000h	L80/B10




/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

SL	LED
AL	incluso / included
A	100°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	0
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white





IVY Ø145 VETRO TRASPARENTE

codice	W	Lm (3000K)	lifetime	
5646.13...	13	1775	60.000h	L80/B10
5646.18...	18	2450	60.000h	L80/B10




/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

SL	LED
AL	incluso / included
	70°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CR190 e CR197) / (CR190 and CR197 on request)
SDCM	3
EEL	A+
RG	1
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white



IVY Ø145 VETRO SATINATO

codice	W	Lm (3000K)	lifetime	
5647.13...	13	1775	60.000h	L80/B10
5647.18...	18	2450	60.000h	L80/B10




/DIMM2 dimmerabile protocollo DALI

/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

SL	LED
AL	incluso / included
	100°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CR190 e CR197) / (CR190 and CR197 on request)
SDCM	3
EEL	A+
RG	0
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white







IVY Ø190 VETRO TRASPARENTE

codice	W	Lm (3000K)	lifetime	
5648.18...	18	2615	60.000h	L80/B10
5648.25...	25	3530	60.000h	L80/B10
5648.33...	33	4500	60.000h	L80/B10



/DIMM2 dimmerabile protocollo DALI



/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

a richiesta / on request

SL	LED
AL	incluso / included
	90°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	1
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white

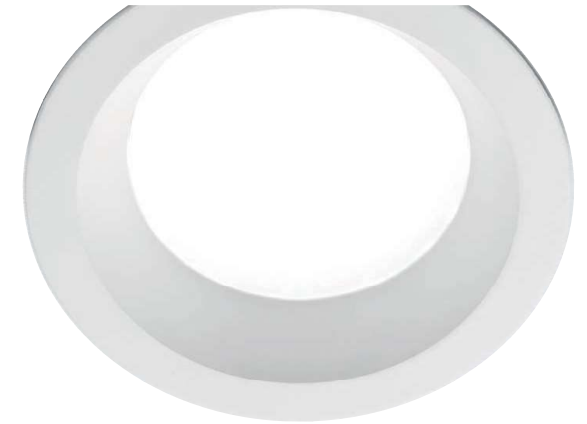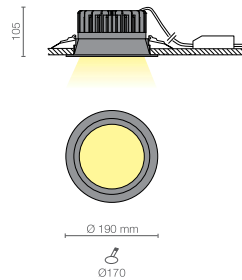

IVY Ø190 VETRO SATINATO

codice	W	Lm (3000K)	lifetime	
5649.18...	18	2615	60.000h	L80/B10
5649.25...	25	3530	60.000h	L80/B10
5649.33...	33	4500	60.000h	L80/B10



/DIMM2 dimmerabile protocollo DALI


/DIMM3 dimmerabile switch-DIM

/DIMM4 dimmerabile tramite APP **CASA MBI**

/EM emergenza

a richiesta / on request

SL	LED
AL	incluso / included
	100°
TC	.30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	0
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white

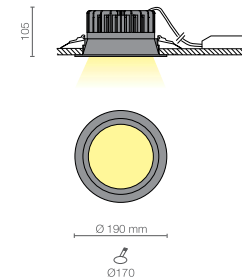



IVY Ø230 VETRO TRASPARENTE


codice	W	Lm (3000K)	lifetime
5650.18...	18	2615	60.000h L80/B10
5650.25...	25	3530	60.000h L80/B10
5650.33...	33	4500	60.000h L80/B10
5650.37...	37	5165	60.000h L80/B10



/DIMM2 dimmerabile protocollo DALI
 /DIMM3 dimmerabile switch-DIM
 /DIMM4 dimmerabile tramite APP **CASA MBI**
 /EM emergenza

a richiesta / on request

SL	LED
AL	incluso / included
A	90°
TC	:30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	1
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white

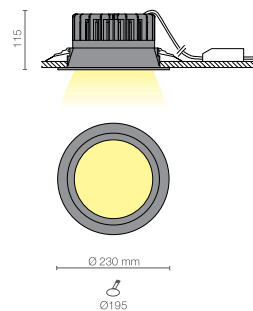

IVY Ø230 VETRO SATINATO

codice	W	Lm (3000K)	lifetime
5651.18...	18	2615	60.000h L80/B10
5651.25...	25	3530	60.000h L80/B10
5651.33...	33	4500	60.000h L80/B10
5651.37...	37	5165	60.000h L80/B10



/DIMM2 dimmerabile protocollo DALI
 /DIMM3 dimmerabile switch-DIM
 /DIMM4 dimmerabile tramite APP **CASA MBI**
 /EM emergenza

a richiesta / on request

SL	LED
AL	incluso / included
A	100°
TC	:30 per 3000K / .40 per 4000K
IP	43
CRI	>80 (a richiesta CRI90 e CRI97) / (CRI90 and CRI97 on request)
SDCM	3
EEL	A+
RG	0
02	Nero opaco / Matt black
08	Bianco satinato / Frosted white

